




**Installation Instructions**  
**BX88128, BX88129, BX88130, BX88131, BX88132**

<i>Serial No.</i>
-------------------

Drop Receiver towing capacity are rated for 5,000 lbs.

**Note: Intended to be used for Flat Towing.**

1. Slide the drop receiver into the receiver hitch, insert 5/8" pin through receiver, and insert clip into pin.

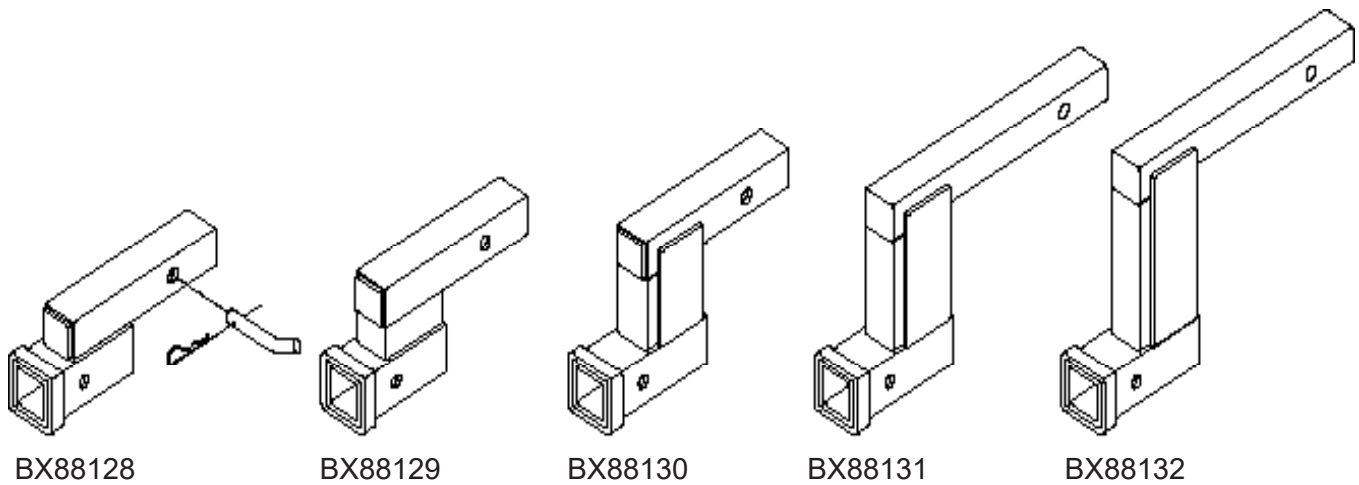

**Parts List**

Ref. No.	Qty.	Part No.	Description
1	1	61-5350 .....	Weldment, 2 Inch Drop Receiver
2	1	61-5351 .....	Weldment, 4 Inch Drop Receiver
3	1	61-5352 .....	Weldment, 6 Inch Drop Receiver
4	1	61-5353 .....	Weldment, 8 Inch Drop Receiver
5	1	61-5354 .....	Weldment, 10 Inch Drop Receiver
6	1	200-1483 .....	Pin, 5/8 x 3 Effective w/ Clip

© 2013 Blue Ox  
 One Mill Road, Industrial Park  
 Pender, Nebraska 68047  
 Phone: (402) 385-3051  
 Fax: (402) 385-3360  
 www.blueox.com