



Recreational Trailer Towing

Fifth Wheel • Gooseneck • Weight Distributing



Have an adventure.

Super Ride™

20K Fifth Wheel Slider Hitch

Patent Pending

The Slider Hitch That Doesn't Slide

Adaptable

Model BXR6200 attaches directly to any brand of gooseneck hitch with a 2-5/16" ball.

Easy

Self-locking hitch head. Quick and easy hook up. Latch engages the kingpin a full 360°.

Comfort

The hitch head is cushioned by 4 rubber springs to smooth the ride, eliminating bucking and stress on the truck and trailer.



Convenient

Lightweight, modular design enables one person installation and removal.

Travel

11" of articulating travel for maneuvering clearance to prevent the trailer from striking the cab of short bed trucks.



Available in Two Models:

BXR6200: Blue Ox Fifth-Wheel Slider Hitch attaches to any gooseneck with a 2-5/16" ball.

BXR7200: Blue Ox Fifth-Wheel Slider Hitch attaches to industry standard bed rails.

Limited Lifetime Warranty



Specifications



Hitch Weight

BXR6200: 210 lbs

BXR7200: 180 lbs

• 5,000 lb Vertical Tongue Weight

• 20,000 lb Gross Trailer Weight

• 3 vertical adjustments: 17", 18", and 19"

Blue Ox Gooseneck Hitch

With the Quick Flip™ Ball



Go From Tow to Stow in Seconds

No reaching in a wheel well to flip the ball.

Twist. Rotate the collar. **Pull.** Pull out the hitch ball. **Flip.** Invert to store.

7,500 lb tongue capacity • 30,000 lb gross capacity

No seizing. 360° rotating ball.

Locking Collar is flush with the truck bed.

No handles. Flip the ball for a flat bed.

Companion® Hitch Shank DH9008

The DH9008 converts the Blue Ox® Gooseneck to the B&W Companion® RVK3500 fifth wheel hitch. Simply drop the adapter into the Blue Ox® gooseneck socket and attach your removable fifth wheel hitch.

4" Offset Gooseneck Ball DH9012



Adaptable to any fifth wheel hitch.

Blue Ox Gooseneck to 5th Wheel Adapter DH9011

- Adapts a Blue Ox Gooseneck Hitch to Fifth wheel rails
- Rails will accommodate any ISR Fifth wheel hitch
- Gross trailer weight capacity: 20,000 lbs.
- Weight: 60 lbs

Gooseneck Model Applications

Year	Model	BX Part Number
Chevy/GMC		
2011-2016	2500, 3500	DH2303
2007-2017	1500	DH2304
2001-2010	2500	DH2302
2007-2010	3500	DH2302
Ram (Dodge)		
2009-2017	1500 (No 4 Corner Air Suspension)	DH2100
2003-2012	2500, 3500	DH2101
2013	2500 (Includes Mega-Cab)	DH2101
2006-2012	1500, 2500, 3500 Mega-Cab	DH2101
Ford		
2017	F250, F350, Super Duty	DH2204
2011-2016	F250, F350, F450 (Includes Super Duty)	DH2200
2015-2016	F150	DH2203
2004-2014	F150	DH2201
Toyota		
2007-2016	Tundra	DH2400
Chassis Cab		
n/a	All Makes w/34" Frame	DH2500
n/a	Chassis Cab Frame (34")	DH2500
Weld in Kit		
n/a	Flat Bed Application Minimum thickness 1/4"	DH9010
5th Wheel Rail Adapter		
n/a	Standard Fifth Wheel Rail Spacing	DH9011

Swaypro™ *Weight Distributing Hitch*



Stop Sway Before it Starts

Trunnions on each side of the Swaypro™ hitch head employ a caster effect, working with the spring bars, to constantly push inward, keeping the trailer in line.

- Prevents sway in all weather conditions
- Easy to use—no pins or clips
- Backup without disconnecting
- Interchangeable spring steel bars
- Quickly hook up and disconnect
- Limited lifetime warranty



Select The Hitch That Fits Your Towing Needs

Does Your Trailer Have a Standard Coupler or an Underslung Coupler?




The Swaypro hitch comes with a Standard Hitch Head (BXW4011) fitting a Standard Coupler welded to the top of the trailer frame.



If your trailer has a coupler welded underneath the frame you will need to replace the hitch head with the Underslung Hitch Head (BXW4012).

Do You Need Clamp-On or Bolt-On Rotating Latches?

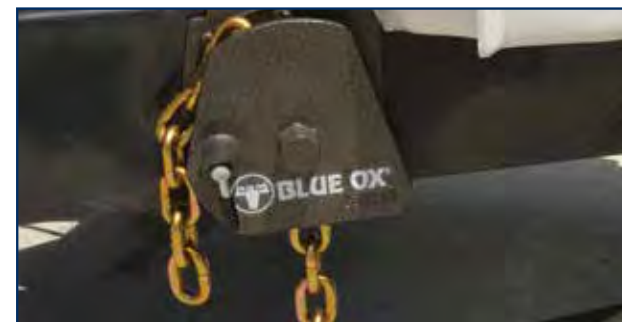

The Swaypro hitch comes standard with Clamp-On Latches (BXW4010). Designed for trailer tongue frames without cross members or equipment blocking attachment of the latches.



If your trailer tongue frame has a cross member or other equipment that prevents attachment of the clamp-on latches you will want to use the Bolt-On Latches (BXW4021).



Typical for: Minivans, 1/2 ton pickups, cars.



Swaypro™ Standard Hitch Shank
7 Hole Adjustment/9" Receiver Stinger
0" to 5" adjustment

Standard Hitch Head/Clamp-On Latches			
BXW0350	350 lb	BXW1000	1000 lb
BXW0550	550 lb	BXW1500	1500 lb
BXW0750	750 lb	BXW2000	2000 lb



Typical for: Large SUVs, 3/4 ton pickups.



Swaypro™ S Series Hitch Shank
9 Hole Adjustment/9" Receiver Stinger
0" to 7-1/2" adjustment

Standard Hitch Head/Clamp-On Latches			
BXW0350-S	350 lb	BXW1000-S	1000 lb
BXW0550-S	550 lb	BXW1500-S	1500 lb
BXW0750-S	750 lb		



Typical for: Pickups & SUVs with lift kits, Heavy duty trucks




Swaypro™ 11 Hole Hitch Shank
11 Hole Adjustment/10" Receiver Stinger
0" to 10" adjustment

Standard Hitch Head/Clamp-On Latches			
BXW0356	350 lb	BXW1006	1000 lb
BXW0556	550 lb	BXW1506	1500 lb
BXW0756	750 lb		

For Our Jayco Family Users

This series is standard with the Underslung Hitch Head, Clamp-On Latches, and the Standard 7 Hole Adjustment Hitch Shank

BXW0353	350 lb	Underslung Hitch Head/Clamp-on Latches
BXW0553	550 lb	Underslung Hitch Head/Clamp-on Latches
BXW0753	750 lb	Underslung Hitch Head/Clamp-on Latches
BXW1003	1000 lb	Underslung Hitch Head/Clamp-on Latches
BXW1503	1500 lb	Underslung Hitch Head/Clamp-on Latches

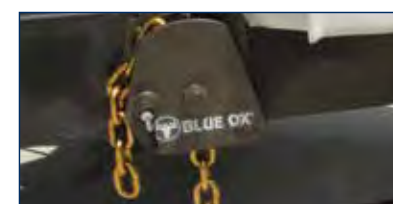

Toll-free 24/7 Customer Care
800-228-9289
Email: info@blueox.com



Strong As An Ox™



Have an adventure.

blueox.com • 800-228-9289

[facebook.com/blueoxproducts](https://www.facebook.com/blueoxproducts)  **[YouTube](https://www.youtube.com/blueoxproducts)**

292-6978 © Blue Ox • One Mill Road • PO Box 430 • Pender, Nebraska 68047